


Interstate Pneumatics compressed air blowguns shown in this catalog feature precision machined chrome plated metal castings and solid brass internal parts. All have a 1/4" NPT female inlet and 1/8" NPT female outlet. Interstate Pneumatics blowguns are lightweight and designed to fit comfortably in the user's hand. Maximum working pressure 225 PSI.

### ALL BRASS INTERNAL PARTS FOR FREE OPERATION

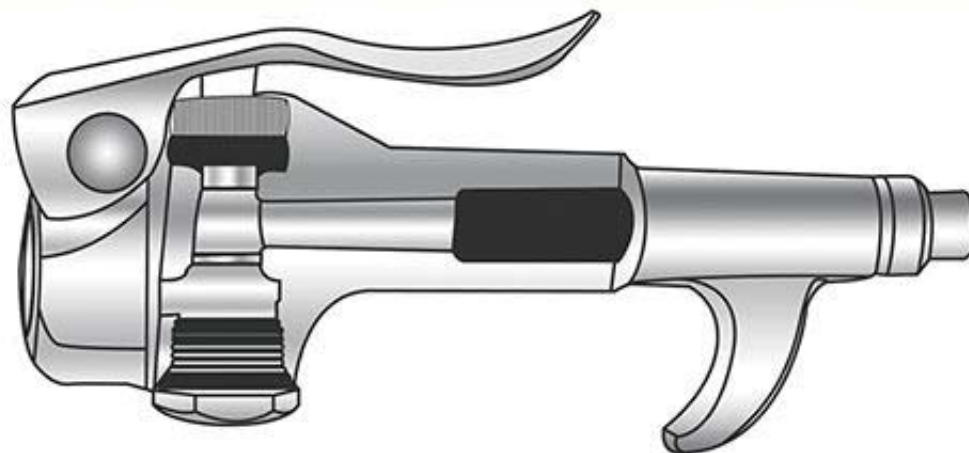

**3 O-Rings**  
Leakproof Operation

**Bottom mounted Nut**  
allows field repair

**Chrome plated cast Zinc body**  
Long service life

### AIR FLOW DATA

Chart below will help you in selecting the proper blowgun for your individual application. The chart shows in CFM (Cubic Feet per Minute), the actual air consumed compared to the air delivered at the tip end. Flow data is based on an inlet pressure of 100 PSI. The maximum sound limit for following blowguns is 87 dBA.

Model Number	Air Consumed CFM	Air Delivered CFM	Model Number	Air Consumed CFM	Air Delivered CFM
<b>B232</b>	10	10	<b>B308</b>	8	14
<b>B234</b>	10	10	<b>B309</b>	35	35
<b>B300</b>	41	41	<b>B500</b>	10	10
<b>B301</b>	8	8	<b>B501</b>	9	9
<b>B302</b>	11	11	<b>B502</b>	14	14
<b>B303</b>	10	10			
<b>B304</b>	18	18			
<b>B306</b>	11	16			
<b>B307</b>	6	15			

**WARNING:** Do not use blowguns on air lines that are not regulated, or when pressure at the gun exceeds 150 PSI. Use the correct size male threaded adapter with Teflon sealing tape. Make sure gun's securely tightened to the adapter. Adapter must be threaded into the gun for the full depth of the female thread. Do not re-tap or modify thread for a non standard adapter. Use of these products contrary to specifications and directions may result in personal injury or property damage. Use eye protection when using blowguns.

## SAFETY BLOWGUNS

**Interstate Pneumatics Safety Series Blowguns** comply with \*OSHA 1910.242b and 1910.95 by using a tip that reduces the pressure from a maximum of 150 PSI to an outlet pressure of 30 PSI at the nozzle. The tip also includes a safety by-pass which prevents excess pressure build-up in the gun if the nozzle becomes clogged or "dead-ended". All **Interstate Pneumatics Safety Series Blowguns** have a 1/4" NPT female inlet and 1/8" NPT female outlet. Area of bottom of Blowgun is recessed to perfectly fit the user fingers allowing a firm yet relaxed grip. Application include blowing away dust, metal chips, wood chips etc.

## B302S SAFETY BLOWGUN WITH RUBBER SAFETY TIP



Zinc die-cast chrome plated body blowgun thumb lever with brass valve and tamper proof rubber coated brass safety tip

## B306 STANDARD SAFETY BLOWGUN WITH SAFETY TIP



BT6S safety brass tip  
Draws additional air through slots in tip to increase output flow by 40%

## B307 STRATA FLOW BLOWGUN WITH SAFETY TIP



BT7S safety brass tip  
Heavy velocity concentrates air into a less turbulent stream for smooth operation

## B308 SAFETY TAMPER PROOF GUN



Brass Tip swivels to prevent removal.  
Excellent general purpose blowgun

## B309 XS3 / XS6 SAFETY BLOWGUN



B309XS3 safety blowgun with 3" extension  
B309XS6 safety blowgun with 6" extension

## B311 IN LINE BLOWGUN



In-line safety blowgun with Brass Tip

## B312S IN-LINE BLOW GUN WITH RUBBER SAFETY TIP



In-line blowgun with Rubber coated Brass safety tip.



## HEAVY DUTY BLOWGUNS


Interstate Pneumatics Heavy Duty Blowguns feature a heavy cast body for durability and long service life in the most rugged applications. Designed for high volume air flow. Maximum working pressure 225 PSI.

### B500 HEAVY DUTY BLOWGUN



Heavy duty blowgun without tip with long barrel

### B502 HEAVY DUTY BLOWGUN ANGLED BARREL

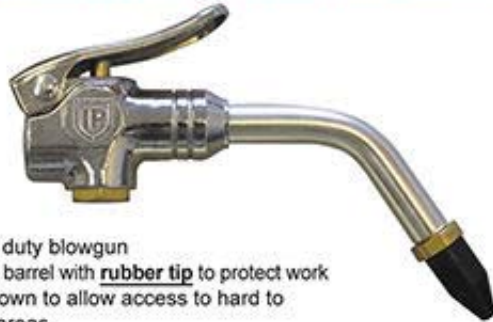

Heavy duty blowgun  
Angled barrel with rubber tip to protect work  
Bent down to allow access to hard to reach areas

### B501 HEAVY DUTY BLOWGUN



Heavy duty blowgun with extended barrel  
and brass tip

## STANDARD & SPECIALTY BLOWGUNS

### B300 STANDARD THUMB LEVER BLOWGUN



1/4" FPT standard thumb lever without tip blowgun

### B301 STANDARD THUMB LEVER BLOWGUN



1/4" FPT standard thumb lever with brass tip

### B302 STANDARD THUMB LEVER BLOWGUN



1/4" FPT standard thumb lever with rubber tip

### B303 PISTOL GRIP BLOWGUN



1/4" FPT pistol grip with rubber tip blowgun

## SAFETY BLOW GUN WITH EXTENSION TIPS & HEX BUSHINGS

### B500XT12 12" EXTENSION BLOW TIP & HEX BUSHING REDUCER



12" extension blow tip & hex bushing  
reducer with a 12" extension.  
Air inlet of 1/4" NPT & a maximum working pressure of 175 PSI

### B500XT24 24" EXTENSION BLOW TIP & HEX BUSHING REDUCER



24" extension blow tip & hex bushing  
reducer with a 12" extension.  
Air inlet of 1/4" NPT & a maximum working pressure of 175 PSI

### B500XT36 36" EXTENSION BLOW TIP & HEX BUSHING REDUCER



36" extension blow tip & hex bushing  
reducer with a 12" extension.  
Air inlet of 1/4" NPT & a maximum working pressure of 175 PSI

## STANDARD AND SPECIALTY BLOWGUNS

### B304 PISTOL GRIP BLOWGUN



1/4" FPT pistol grip with 8" steel extension

### B204 NYLON BLOWGUN



1/4" FPT female nylon blowgun  
Maximum working pressure 175 PSI.

### B305 STANDARD THUMB LEVER SIPHON SPRAYGUN

The Interstate Pneumatics Siphon Spray Gun blows air / liquid (cleaning solution) to clean auto engines and other mechanical parts, it comes with a control valve to regulate density of mist.



1/4" FPT standard thumb lever siphon spraygun  
Comes with 1/4" x 8ft. long PVC Tubing

### B312 IN-LINE BLOWGUN



In-line blowgun with rubber tip. It is secured permanently between coupler and airhose. Provide 1/4" FPT connections for easy installation.

### BZ306 BLOWGUN KIT



Kit includes:  
**B301** Standard economy Safety Blowgun  
**BT6S** 1/8" MPT Slotted brass tip  
**BTN3** 0.065" x 1-3/4" Needle tip  
**BTN4** 0.095" x 2-1/2" Needle tip  
**BTN5** 0.134" x 2-3/4" Needle tip

## 1/4" ADJUSTABLE AUTOMOTIVE / INDUSTRIAL POCKET BLOWGUN



**B100A** 1/4" adjustable automotive pocket blowgun



**B100H** 1/4" adjustable industrial pocket blowgun



## STANDARD AND SPECIALTY BLOWGUNS

## B600 HEAVY-DUTY BLOWGUN


**HURRICANE**


Die Casted Aluminum Heavy Duty Blowgun Copper Plated with smooth surface body with 1/4" NPT inlet

## B610 HEAVY-DUTY BLOWGUN


**HURRICANE**


Die Casted Aluminum Heavy Duty Blowgun Copper Plated with body ridges with 3/8" NPT inlet

## INFLATORS / AIR NOZZLES

## B232 ECONOMY BLOWGUN



Lightweight tilt valve blowgun. Press side of gun to operate. 1/4" MPT inlet Ideal for inflating balloons.

## B234 ECONOMY BLOWGUN



Lightweight tilt valve blowgun. Press side of gun to operate. 1/4" FPT inlet. Ideal for inflating balloons.


## TIPS AND ACCESSORIES

These tips can be placed on any Interstate Pneumatics B300, B500 series blowgun body.

## SAFETY NOZZLE TIPS

	MODEL #	DESCRIPTION		MODEL #	DESCRIPTION
	<b>BT6S</b>	1/8" MPT Slotted brass tip		<b>BT2S</b>	1/8" MPT Rubber tip molded rubber on brass Rubber skin for BT8S, brass tip
	<b>BT7S</b>	1/8" MPT Strata flow safety tip			

## NEEDLE TIPS



BTN5A NEEDLE TIP ASSORTMENT  
INCLUDES ALL 5 SIZES OF NEEDLE TIPS.

Model #	OD	Pin Length (L)
<b>BTN1</b>	0.0425"	7/8"
<b>BTN2</b>	0.050"	1-1/8"
<b>BTN3</b>	0.065"	1-3/4"
<b>BTN4</b>	0.095"	2-1/2"
<b>BTN5</b>	0.134"	2-3/4"



- BTN1**
- BTN2**
- BTN3**
- BTN4**
- BTN5**

## NOZZLE TIP



**BT1** 1/8" MPT Brass tip



**BT2** 1/8" MPT Rubber tip molded rubber on brass

## STANDARD EXTENSION TIPS



1/8" MPT

- BX3** Standard 3" extension tip
- BX6** Standard 6" extension tip

## SAFETY EXTENSION TIPS

OSHA COMPLIANT



1/8" MPT

- BXS03** 3" Safety extension
- BXS06** 6" Safety extension
- BXS12** 12" Safety extension
- BXS24** 24" Safety extension
- BXS36** 36" Safety extension

## TELESCOPING EXTENSION BLOWGUN TIPS



- BXT12** 12" Telescoping Extension Blowgun Tip with 1/8" MPT
- BXT24** 24" Telescoping Extension Blowgun Tip with 1/8" MPT
- BXT36** 36" Telescoping Extension Blowgun Tip with 1/8" MPT

\* Using different tips on these blowguns will affect the SCFM  
1/8" NPT male threads on all blowgun tips